


FLOOD HAZARD MAP OF PRIETO DIAZ QUADRANGLE

124°00'08.93"E 124°01'08.93"E 124°02'08.93"E 124°03'08.93"E 124°04'08.93"E 124°05'08.93"E 124°06'08.94"E 124°07'08.94"E 124°08'08.94"E 124°09'08.94"E 124°10'08.94"E 124°11'08.94"E 124°12'08.94"E

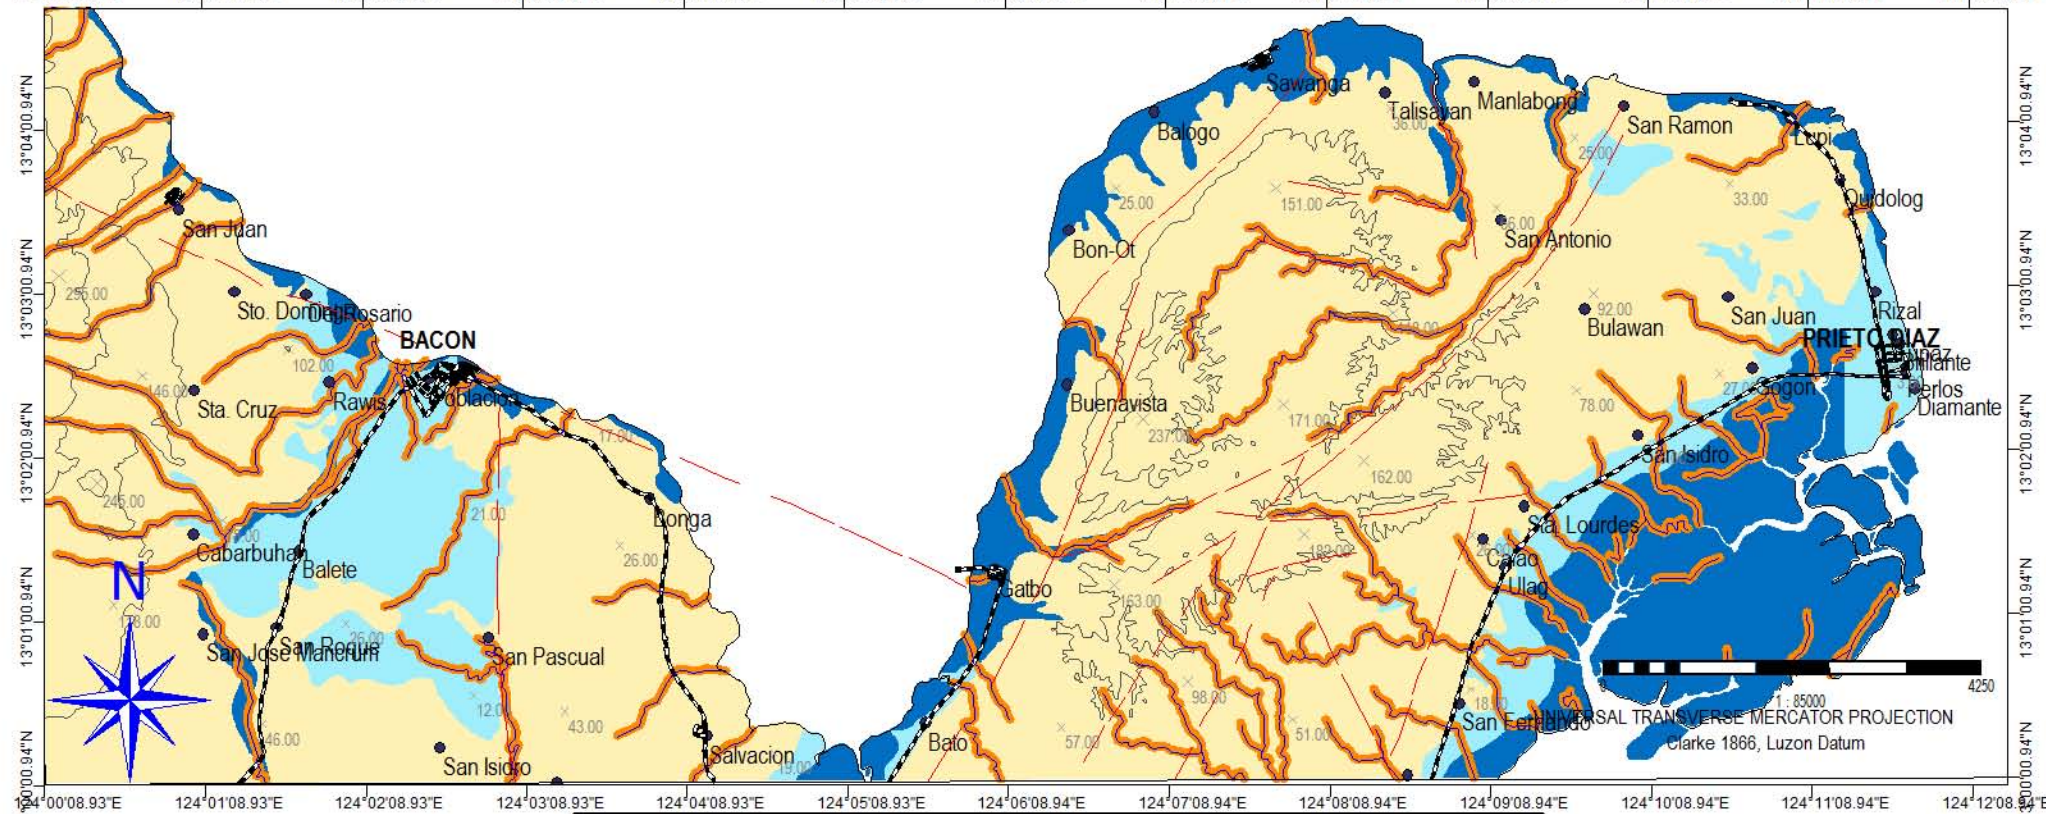

MAP LEGEND

Flood Hazard Zones

- areas prone to riverbank erosion
- non flood prone areas
- occasionally to rarely flooded areas
- regularly to frequently flooded areas

- fault
- river
- road

Published by:
Department of Environment and Natural Resources
MINES AND GEOSCIENCES BUREAU
Rawis, Legazpi City, Albay

EXPLANATIONS:

Flood hazard susceptibility zones were derived based on the geomorphological analysis of landforms and the fluvial system. Information on flood occurrences, flood depths, duration of inundation as well as topographic information supported the geomorphologically-based flood hazard mapping.

Regularly to Frequently Flooded Areas:
Areas that are frequently flooded. Mere heavy rains of 1-2 days could bring about flooding in these areas. Moderate to strong typhoons could submerge these areas 0.5 to 3.0 m. in flood waters for a few days to a few weeks. Housing development in these areas is not recommended.

Occasionally to Rarely Flooded Areas:
Areas become inundated during moderate to strong typhoons. Flood depths vary from a few centimeters to 1 m. Floods last from a few hours to a few days.

Non Flood Prone Areas:
Areas with no reported flood occurrences except along low lying areas adjoining rivers or creeks.


Areas Prone to Riverbank Erosion:
Areas 0 to 50 m. from river banks that are prone to scouring and erosion.

Field data collection by: A. E. Dayao, JM. S. Laud, E.T. Avila, E. G. Basilan, MN. L. Miraballes, J. N. Malto
Geomorphological interpretation by: A. E. Dayao, E. G. Basilan
Digital cartographic processing by: E. G. Basilan, D. G. Zepeda
GIS processing by: A. E. Dayao, E. G. Basilan
Checked by: R.A. Juan
Approved by: R.A. Juan

Other sources of information:
1:50,000 NAMRIA Topographic Map


13°00'00.94"N 13°01'00.94"N 13°02'00.94"N 13°03'00.94"N 13°04'00.94"N

LIQUEFACTION POTENTIAL MAP OF PRIETO DIAZ QUADRANGLE

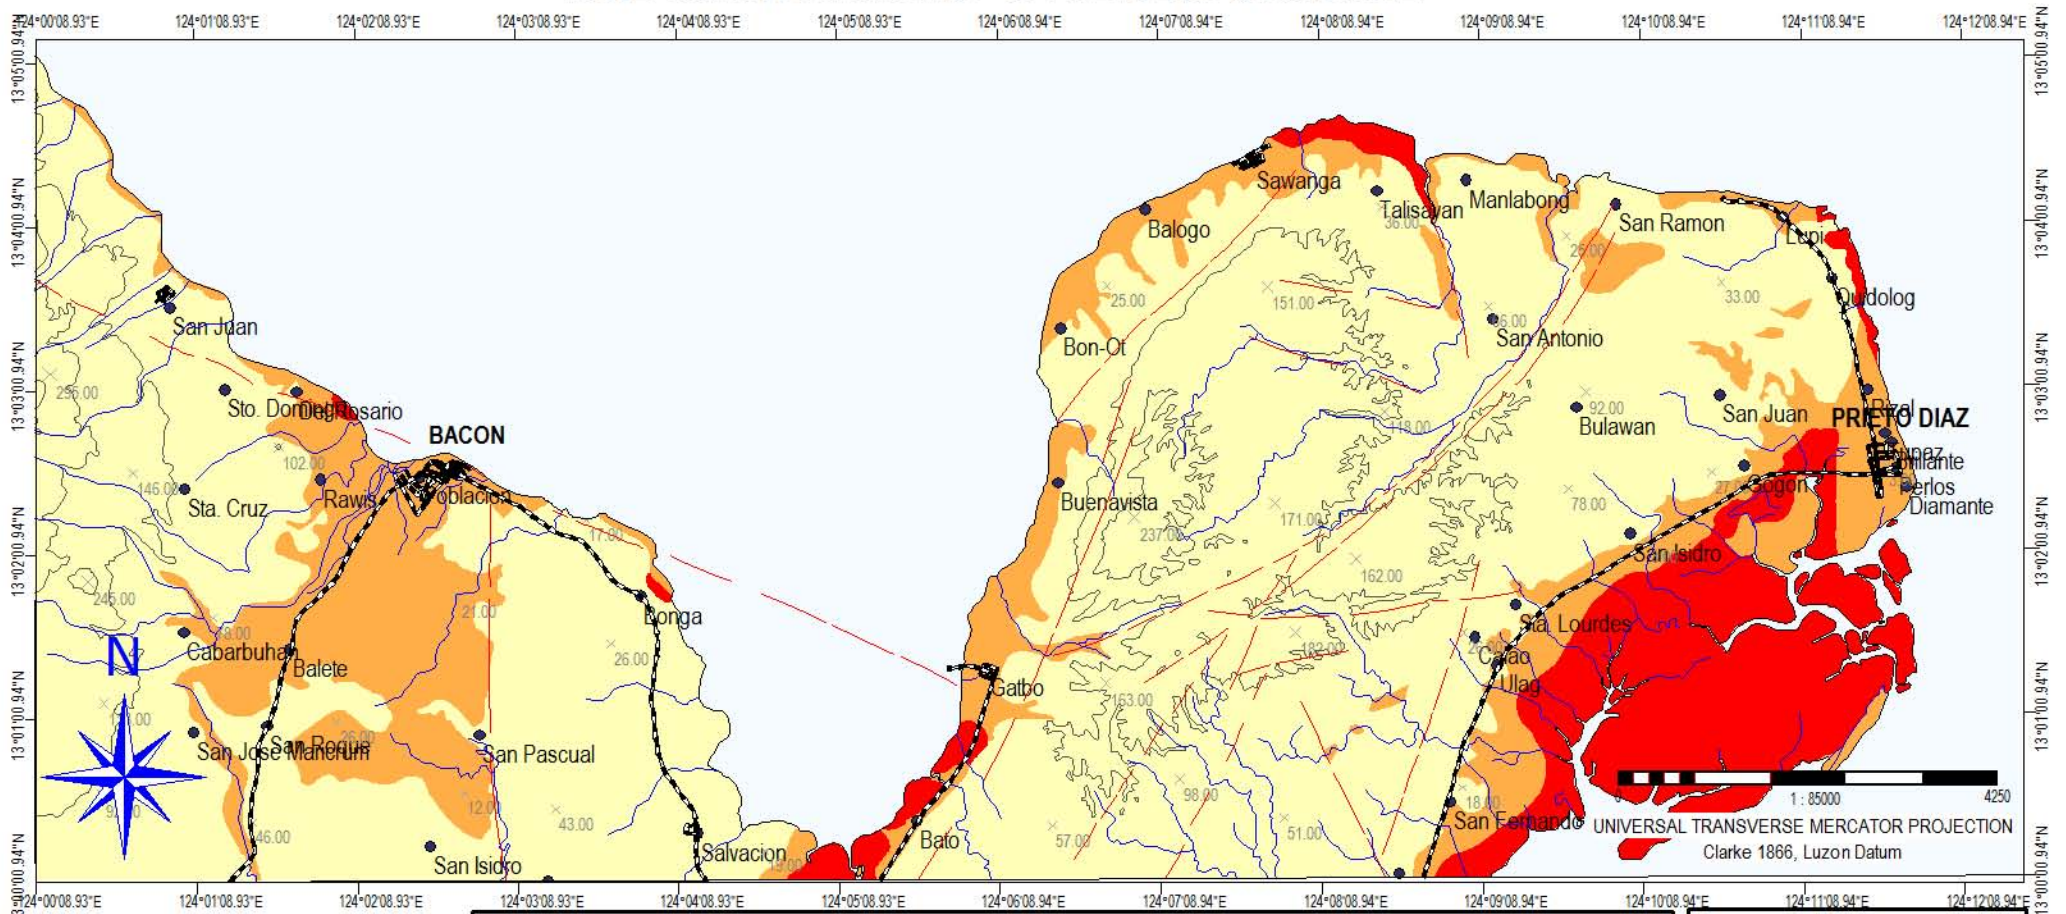

MAP LEGEND
Liquefaction Potential Zones:

- areas where liquefaction is likely
- areas where liquefaction is not likely
- areas where liquefaction is possible
- fault
- river
- road



Published by:
Department of Environment and Natural Resources
MINES AND GEOSCIENCES BUREAU-RO5
Rawis, Legazpi City, Albay

EXPLANATIONS:
There are no reported liquefaction occurrences in the mapped area based on several field interviews. However, zones of different liquefaction potential were derived based on the geomorphological analysis of the study area following previous studies made by Iwasaki and Yasuda.

Areas where Liquefaction is Likely:
Areas where liquefaction is likely include active/young tidal flats with nipa and mangrove, beach ridge and swale complex and spit. These areas are unsuitable for urban development. Multi-storey building should be required of geotechnical studies addressing or mitigating the effects of liquefaction.


Areas Where Liquefaction is Possible:
Coastal plains and the alluvial plains are areas where liquefaction is possible. Buildings having 5 storeys or more should be required a full geotechnical study.

Areas where Liquefaction is not Likely:
Areas where the likelihood of liquefaction is unlikely.

Field data collection by: A. E. Dayao, JM S. Laud, E.T. Avila, E. G. Basilan, MN. L. Miraballes, J. N. Malto
Geomorphological interpretation by: A. E. Dayao, E. G. Basilan
Digital cartographic processing by: E. G. Basilan, D. G. Zepeda
GIS processing by: A. E. Dayao, E. G. Basilan
Checked by: R.A. Juan
Approved by: R.A. Juan

Other sources of information:
1:50,000 NAMRIA Topographic Map
1951 B/W Aerial photos

LANDSLIDE SUSCEPTIBILITY MAP OF PRIETO DIAZ QUADRANGLE

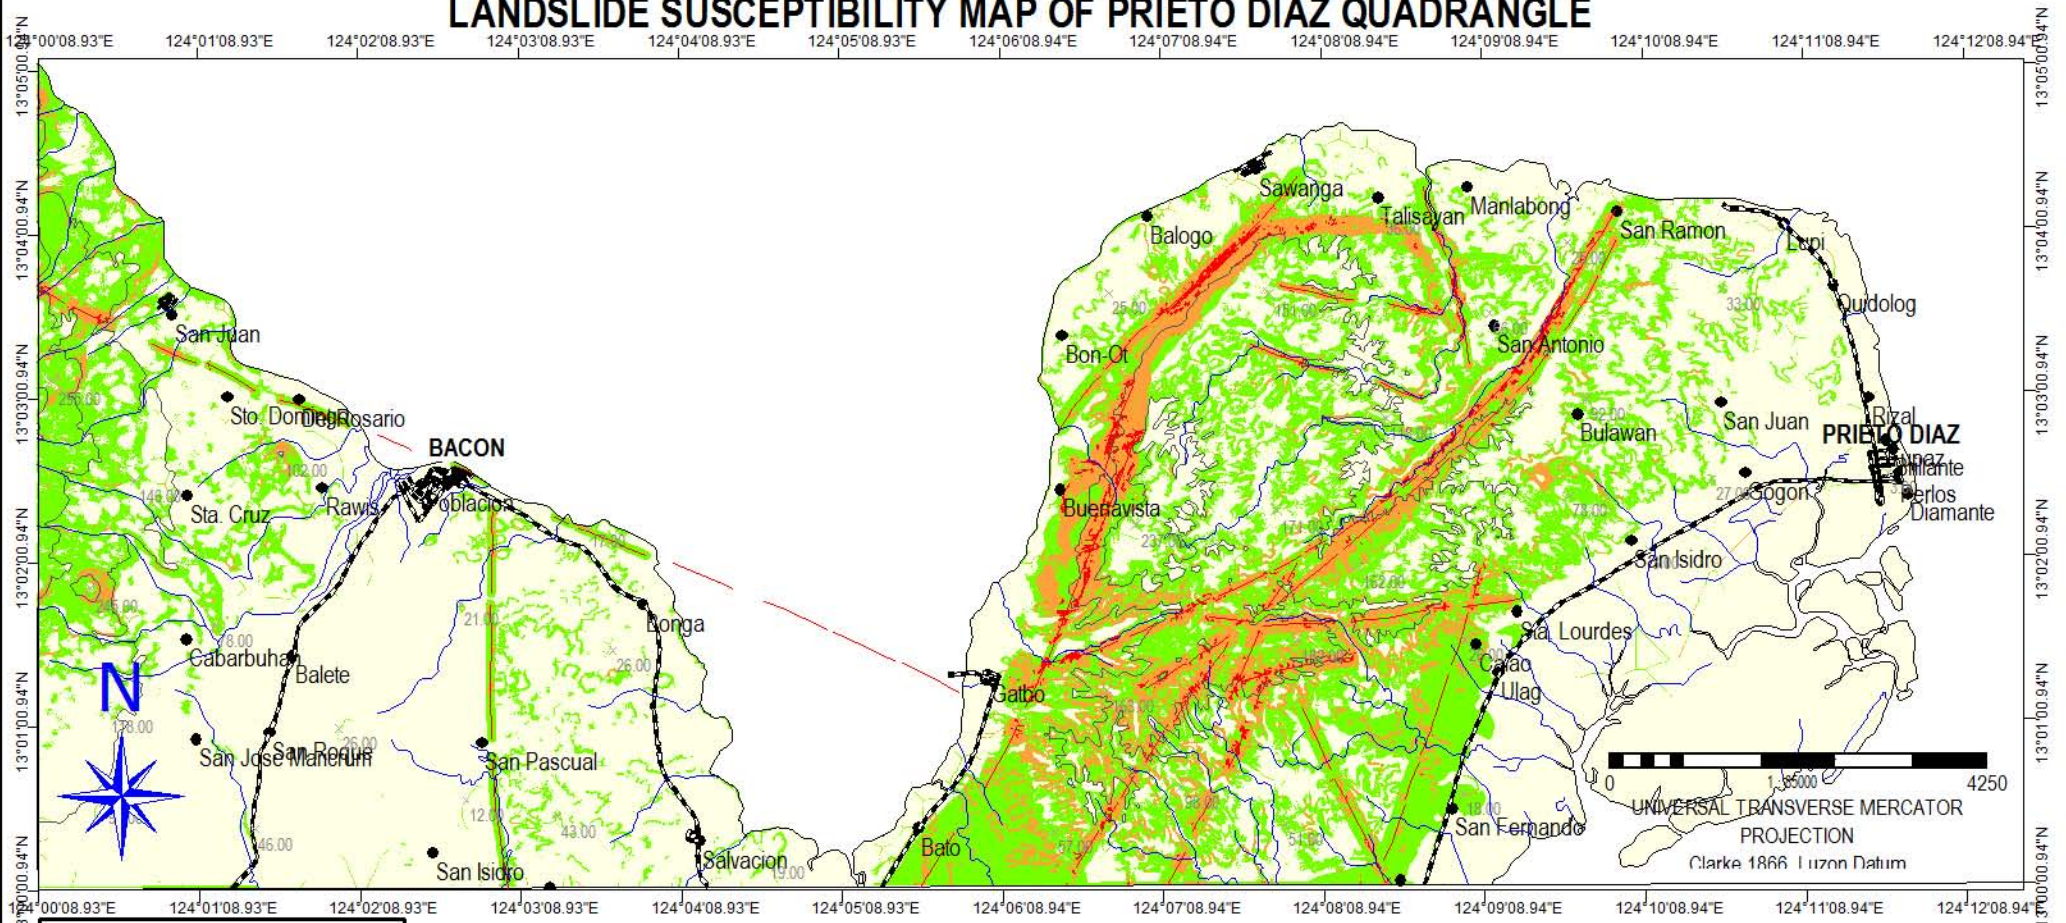

MAP LEGEND:
Landslide Susceptibility Zones:

- absent
- low to absent
- moderate
- high
- fault
- river
- road

EXPLANATIONS:


Landslide hazard susceptibility zones were derived through qualitative map combination using lithology, geomorphology, slope gradient, road distance and fault distance. GIS was used in the map combination and subjective weights were assigned to each unit in the parameter map.

Areas with Moderate Susceptibility to Landslides:
Areas having moderate likelihood of occurrence of landslides are recommended for more detailed engineering geological and geohazard assessment prior for housing development.

Areas with Absent or Low Susceptibility to Landslides:
Areas where the likelihood of landslide occurrence is either absent or low.


Field data collection by: A.E. Dayao, J.M.S. Laud, E.T. Avila, E.G. Basilan, M.N.L. Miraballes, J.N. Malto
 Geomorphological interpretation by: A.E. Dayao, E.G. Basilan
 Digital cartographic processing by: E.G. Basilan, D.G. Zepeda
 GIS processing by: A.E. Dayao, E.G. Basilan
 Checked by: R.A. Juan
 Approved by: R.A. Juan

Other sources of information:
 1:50,000 NAMRIA Topographic Map
 1951 B/W Aerial photos



Published by:
 Department of Environment and Natural Resources
 MINES AND GEOSCIENCES BUREAU-RO5
 Rawis, Legazpi City, Albay

GROUND SUBSIDENCE AND GROUND SETTLEMENT SUSCEPTIBILITY MAP OF PRIETO DIAZ QUADRANGLE

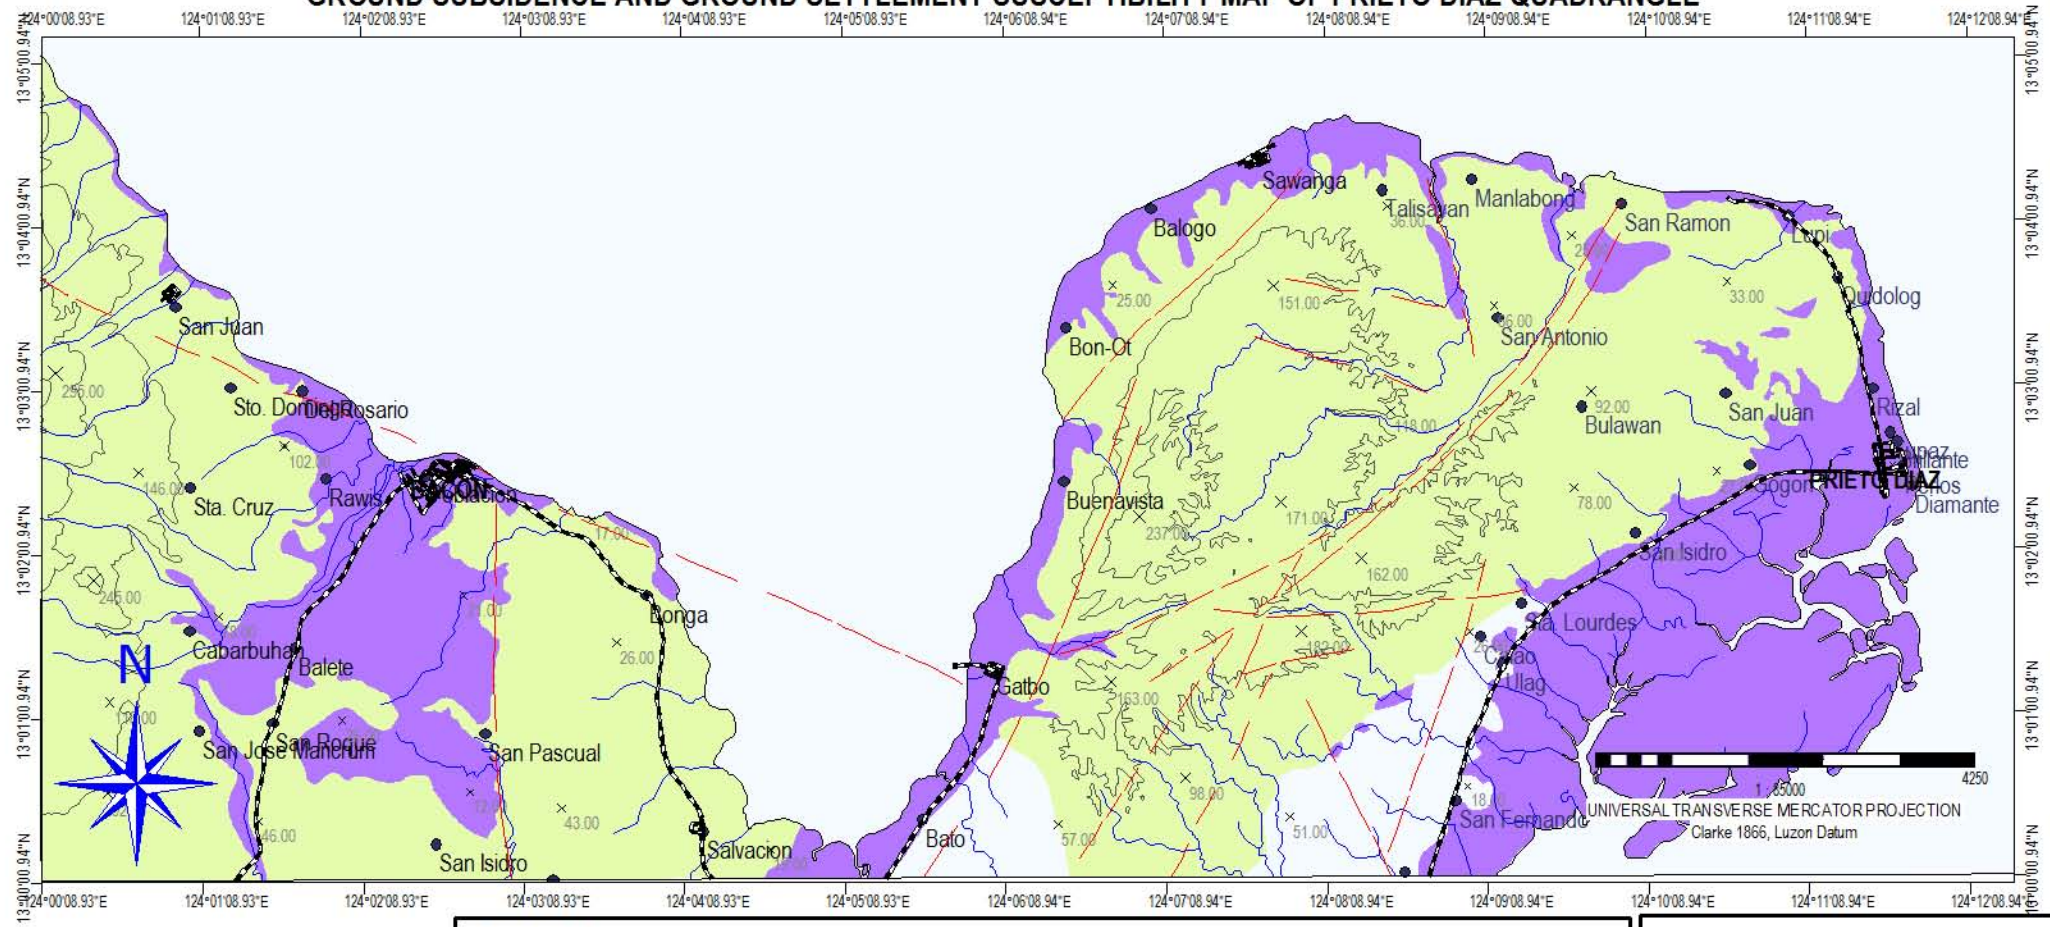

MAP LEGEND:

Ground Subsidence and Ground Susceptibility Map

- areas not susceptible to ground subsidence/settlement
- areas susceptible to ground settlement
- areas susceptible to ground subsidence
- fault
- river
- road

EXPLANATIONS:

Susceptibility map for ground subsidence due to karst or solution processes was primarily derived from the lithologic map of the study area. Field observations on sinkholes and ground subsidence observed on concrete roads and damaged houses supported the mapping. Areas of possible ground settlement were delineated through the analysis of the geomorphological lay of the study area, the sub-surface soils and the ground water levels.


Areas Susceptible to Ground Subsidence:
Areas that are prone to ground cavitation, sinkhole formation and ground subsidence in areas underlain by limestone and calcareous siltstones and shales.

Areas Susceptible to Ground Settlement:
Areas where fluvialite sands, silts and clays coupled with shallow ground water tables are site of possible ground settlement. Ground settlement may be reduced through appropriate foundation design. Buildings having 3 storeys or more should be tested for settlement and/or consolidation. Buildings having 5 storeys or more should undergo detailed geotechnical studies.

Areas not Prone to Ground Settlement/Subsidence:
Areas where the possibility of ground settlement or ground subsidence is low or absent.

Field data collection by: A.E. Dayao, J.M.S. Laud, E.T. Avila, E.G. Basilan, M.N.L. Miraballes, J.N. Malto
 Geomorphological interpretation by: A.E. Dayao, E.G. Basilan
 Digital cartographic processing by: E.G. Basilan, D.G. Zepeda
 GIS processing by: A.E. Dayao, E.G. Basilan
 Checked by: R.A. Juan
 Approved by: R.A. Juan

Other sources of information:



Published by:
 Department of Environment and Natural Resources
MINES AND GEOSCIENCES BUREAU-RO5
 Rawis, Legazpi City, Albay